

Fixed Bollard 900mm Above Ground 60mm -193mm Diameter Galvanised - Concrete In






The galvanised mild steel range of 900mm tall fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round bollards are available in 60mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available.

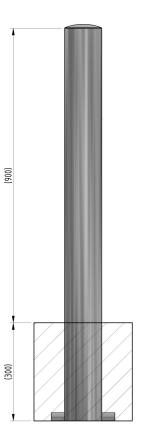

Part Number	<u>Diameter</u>	Weight (kg)
138 121 113	60mm Galvanised	5kg
138 121 243	76mm Galvanised	6kg
138 121 293	90mm Galvanised	7kg
138 121 313	101mm Galvanised	9kg
138 121 413	114mm Galvanised	10kg
138 121 523	127mm Galvanised	11kg
138 121 613	139mm Galvanised	20 kg
138 121 663	152mm Galvanised	13kg
138 121 713	168mm Galvanised	24kg
138 121 793	193mm Galvanised	28kg

Product details

- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm, 168mm, and 193mm
- Concrete in 300mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).





