




Fixed Bollard 900mm Above Ground 60mm -193mm Diameter Galvanised - Bolt Down

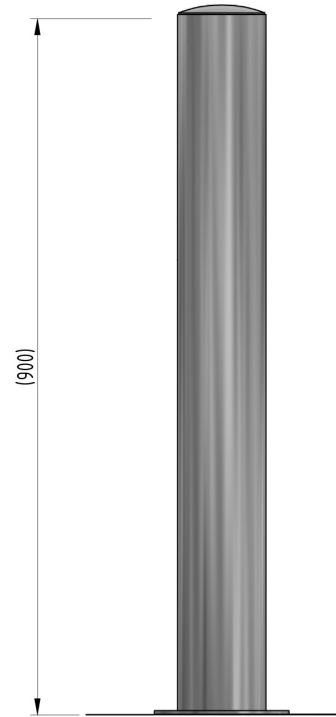

The galvanised mild steel range of 900mm tall fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round bollards are available in 60mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available.

<u>Part Number</u>	<u>Diameter</u>	<u>Weight (kg)</u>
138 121 118	60mm Galvanised	5kg
138 121 242	76mm Galvanised	6kg
138 121 292	90mm Galvanised	7kg
138 121 311	101mm Galvanised	9kg
138 121 412	114mm Galvanised	10kg
138 121 527	127mm Galvanised	11kg
138 121 602	139mm Galvanised	20kg
138 121 664	152mm Galvanised	13kg
138 121 701	168mm Galvanised	21kg
138 121 794	193mm Galvanised	25kg

Product details

- 3mm wall thickness - 60mm-127mm and 152mm
- 5mm wall thickness - 139mm, 168mm, and 193mm
- 3 hole round plate – 133mm x 5mm – 60mm & 76mm diameters
- 3 hole round plate – 180mm x 5mm – 90mm - 114mm diameters
- 4 hole square plate - 250mm x 10mm - 127mm - 193mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

