


Plain Round Bollard 1000mm Above Ground 60mm - 219mm Diameter Galvanised - Concrete In

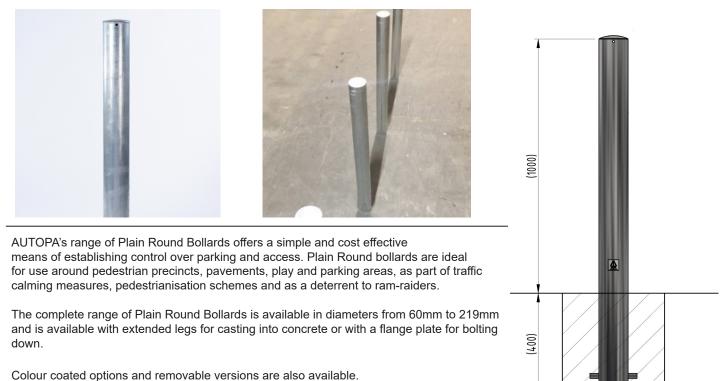

Part Number	<u>Diameter</u>	<u>Weight (kg)</u>
138 121 123	60mm Galvanised	6kg
138 121 203	76mm Galvanised	7kg
138 121 284	90mm Galvanised	9kg
138 121 303	101mm Galvanised	10kg
138 121 403	114mm Galvanised	12kg
138 121 503	127mm Galvanised	13kg
138 121 603	139mm Galvanised	23kg
138 121 675	152mm Galvanised	15kg
138 121 703	168mm Galvanised	28kg
138 121 803	193mm Galvanised	33kg
138 121 903	219mm Galvanised	37kg

Product details

- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm, 168mm 219mm
- Concrete in 400mm (below ground)

Installation & use

Bolt down to a suitable concrete surface. Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

