




Plain Round Bollard 1500mm Above Ground 114mm - 219mm Diameter Galvanised - Bolt Down

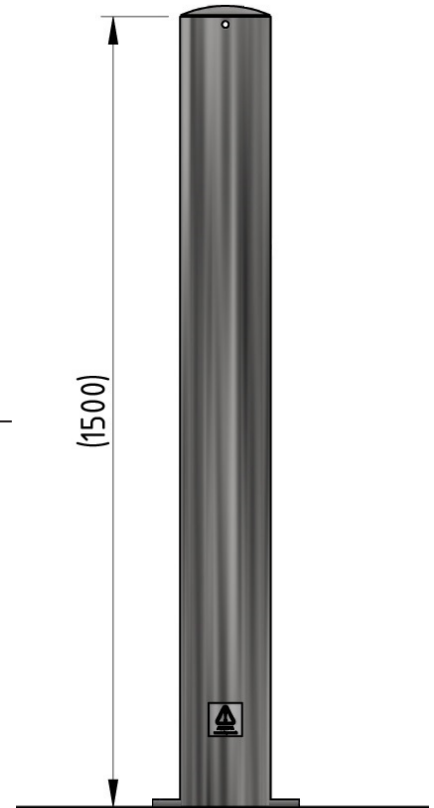

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 114mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

<u>Part Number</u>	<u>Diameter</u>	<u>Weight (kg)</u>
138 121 442	114mm Galvanised - Bolt Down	16kg
138 121 612	139mm Galvanised - Bolt Down	33kg
138 121 653	152mm Galvanised - Bolt Down	22kg
138 121 711	168mm Galvanised - Bolt Down	37kg
138 121 813	193mm Galvanised - Bolt Down	44kg
138 121 917	219mm Galvanised - Bolt Down	50kg

Product details

- 3mm wall thickness - 114mm and 152mm
- 5mm wall thickness - 139mm, 168mm - 219mm diameters
- 3 hole round plate – 180mm x 5mm – 76mm to 114mm diameters
- 4 hole square plate – 250mm sq x 10mm – 139mm to 193mm diameters
- 4 hole square plate – 400mm sq x 10mm – 219 diameter

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

