

## Plain Round Bollard 1500mm Above Ground 114mm - 219mm Diameter Galvanised - Concrete In






AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 114mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

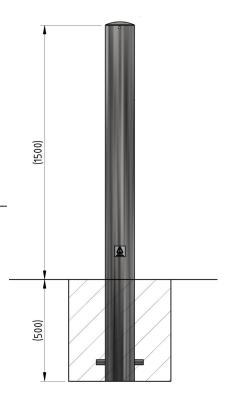

Part Number	<u>Diameter</u>	Weight (kg)
138 121 447	114mm Galvanised	16kg
138 121 609	139mm Galvanised	33kg
138 121 680	152mm Galvanised	22kg
138 121 714	168mm Galvanised	40kg
138 121 808	193mm Galvanised	47kg
138 121 908	219mm Galvanised	53kg
138 121 908	219mm Galvanised	53kg

## **Product details**

- 3mm wall thickness 114mm and 152mm
- 5mm wall thickness 139mm, 168mm 219mm
- Concrete in 500mm (below ground)

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).





