


## Plain Round Bollard 1000mm Above Ground 168mm - 323mm Diameter Galvanised - Bolt Down

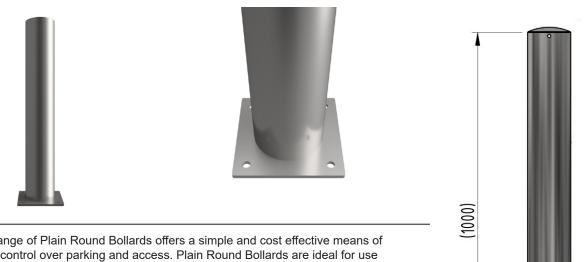

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 60mm to 323mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated versions are also available.

| Part Number | <u>Diameter</u>  | <u>Weight (kg)</u> |
|-------------|------------------|--------------------|
| 138 121 702 | 168mm Galvanised | 25kg               |
| 138 121 804 | 193mm Galvanised | 28kg               |
| 138 121 913 | 219mm Galvanised | 39kg               |
| 138 122 113 | 273mm Galvanised | 54kg               |
| 138 122 213 | 323mm Galvanised | 62kg               |

## **Product details**

- 5mm wall thickness 168mm 219mm
- 6.3mm wall thickness 273mm 323mm
- Complete with a welded steel cap

- 4 hole square plate 250mm x 10mm 168mm 193mm
- 4 hole square plate 400mm x 10mm 219mm 323mm
  - Installation & use

Bolt down to a suitable concrete surface. Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



## www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

## ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management Systems CERTIFIED CERTIFIED ISO 45001 Provincemental Management CERTIFIED CERTIFIED

4