



# Frankton Cycle Stand


## Galvanised, Galvanised & Colour or Stainless



The tubular cycle stand, a familiar sight throughout the UK, allows the frame of the bicycle to be secured by the users own security lock.

Suitable for securing two bicycles.

The practical and durable nature of the Frankton tubular cycle stand ensures it has been consistently favoured by both specifiers and users since it's introduction in the 2000's. Shown is the galvanised flanged version of the Frankton Cycle Stand.

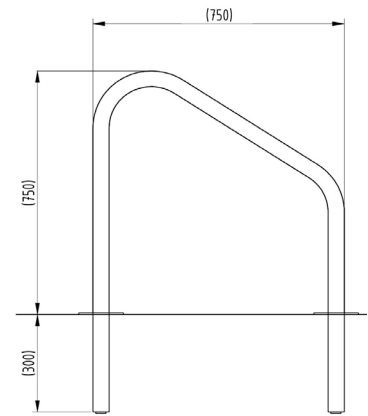

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 515 015	Galvanised - Concrete In	9kg
138 515 005	Galvanised - Bolt Down	8kg
138 515 017	Galvanised & Black - Concrete In	9kg
138 515 007	Galvanised & Black - Bolt Down	8kg
138 515 020	Galvanised & Colour - Concrete In	9kg
138 515 010	Galvanised & Colour - Bolt Down	8kg
138 515 025	Stainless Steel Grade 304 - Concrete In	9kg
138 515 012	Stainless Steel Grade 304 - Bolt Down	8kg

### Product details

- 48mm diameter tube
- 750mm x 750mm (height x length)
- Concrete in 300mm (below ground)
- Round flange plate – 133mm x 5mm
- Each stand requires 6 bolts (bolt down)

### Installation & use

Bolt down to a suitable concrete surface.  
 Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
 Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
 Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
 +44 (0)1788 550556

AUTOPA Limited  
 Cottage Leap, Rugby, Warwickshire CV21 3XP

